



# AIGI HIGH QUALITY PACKINGS

## AIGI 28 Power Station Packing

DATA SHEET



### Properties Value

|                  |  |
|------------------|--|
| Color            | Black  |
| Temperature      | 1000°C (over 650°C ask for technical advise) |
| PH Range         | PH 0-14                                      |
| Max. Liner speed | 13m/s  |
| Pressure         | 200Kg/cm2 (3000 PSI)                         |

### Service Media & Conditions


Pumps and valves against steam, water, solvents, acids and alkalies

### Application

Wide range for general sealing applications: Pumps, mixers, refiners, Valves, Agitators and other rotating

AIGI28 comes in all cross-sections (size) and 5 pound and 10 pound boxes

**AIGI 28 is an interbraid Packing using high quality carbon fiber reinforced flexible graphite tape. The extreme temperature resistance, self-lubricated capability and high heat dissipation make AIGI 28 an excellent choice for high temperature and high speed equipment. The tremendous seal-ability and strength of the reinforced flexible graphite also make it an excellent choice for valves in power plants.**

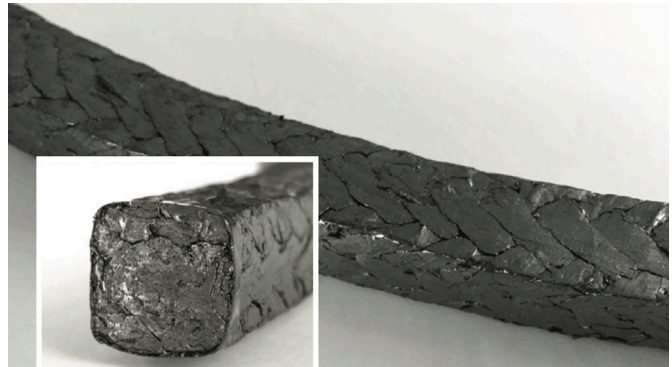

**AIGI ENVIRONMENTAL INCORPORATED**

A Subsidiary of AIGI Group

[www.aigienvironmental.com](http://www.aigienvironmental.com)



**You Tube**

To visit our channel go to :  
<http://youtube.com/Aigienvironmental1996>

Distributed by :

**Sizonke Trading**  
Quality Engineering Solutions & Supplies  
Web: [www.sizonkegroup.co.za](http://www.sizonkegroup.co.za)