



AIGI HIGH QUALITY PACKINGS

AIGI 22 Power Station Packing

DATA SHEET



Properties Value

Color	Black
Temperature	570°C
PH Range	PH 0-14
Max. Liner speed	15 m/s
Pressure	250Kg/cm ² (3625 PSI)


Service Media & Conditions

Pumps and valves against steam, water, solvents, acids and alkalies

Application

Wide range for general sealing applications: Pumps, mixers, refiners, Valves, Agitators and other rotating equipment.

AIGI22 comes in all cross-sections (size) and 5 pound and 10 pound boxes

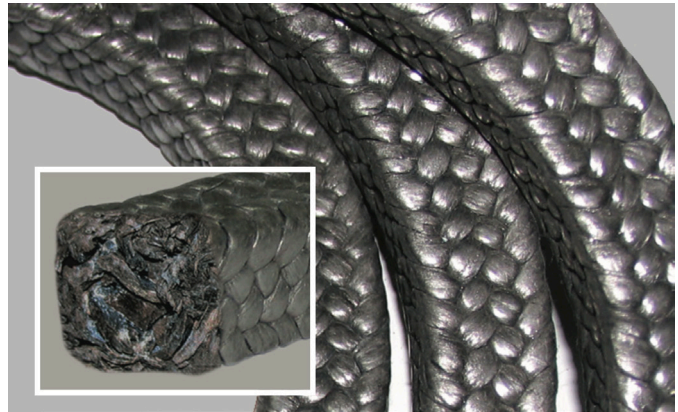

AIGI 22 is made from a high strength, high purity carbon fiber with only minor quantities of braiding sizings added giving the finished packing great temperature and pressure resistance. It is designed for use in high temperature valves and pumps against steam, hot water, solvents, acids and alkalies especially in Power Stations



AIGI ENVIRONMENTAL INCORPORATED

A Subsidiary of AIGI Group

www.aigienvironmental.com



You Tube

To visit our channel go to :
<http://youtube.com/Aigienvironmental1996>

Distributed by :

Sizonke Trading
Quality Engineering Solutions & Supplies
Web: www.sizonkegroup.co.za