




AIGI HIGH QUALITY PACKINGS

AIGI 23 (PTFE/Aramid Packing)

DATA SHEET

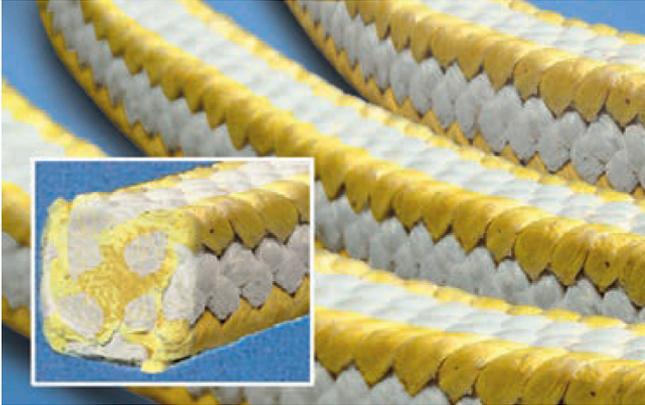

Properties Value

Color	White/Yellow
Temperature	260°C (500 F)
PH Range	PH 2-12
Pressure	28Kg/cm2 (400 PSI / 28 Bar)


Service Media & Conditions

Sugar Mill Packing

AIGI 23 is a braided PTFE fiber packing with high strength Aramid fiber corners. Because of the Aramid fiber's high strength and PTFE's self-lubrication, AIGI 23 has excellent flexibility and abrasion resistance. With the addition of a post braiding PTFE lubricant, AIGI 23 significantly reduces shaft wear normally associated with Aramid fiber packings. AIGI 23 is designed to be used in aggressive slurry and high abrasive content applications.

Application

Wide range for general sealing applications: Pumps, mixers, refiners, Valves, Agitators and other rotating equipment.

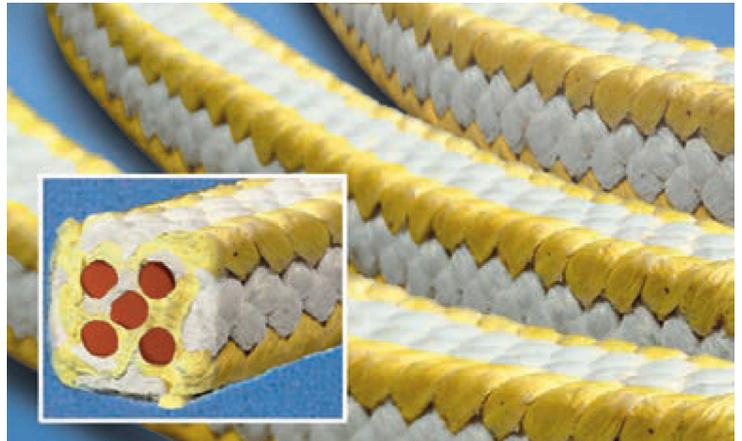

AIGI ENVIRONMENTAL INCORPORATED

A Subsidiary of AIGI Group

www.aigienvironmental.com



You Tube

To visit our channel go to :
<http://youtube.com/Aigienvironmental1996>

Distributed by :

Sizonke Trading
Quality Engineering Solutions & Supplies
Web: www.sizonkegroup.co.za